ELVOKA Mast

LED-Flutlicht für Sportplätze und Stadions

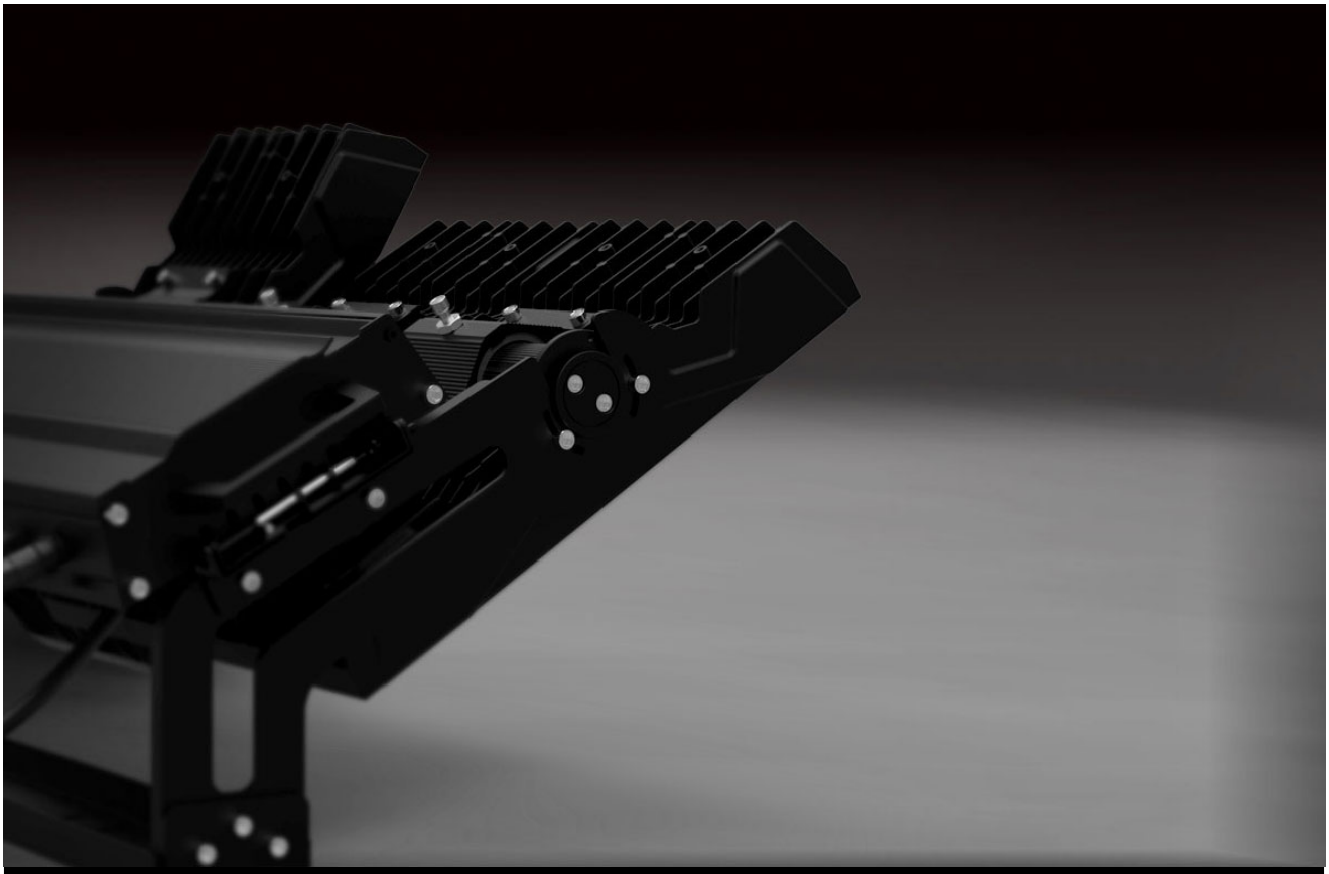

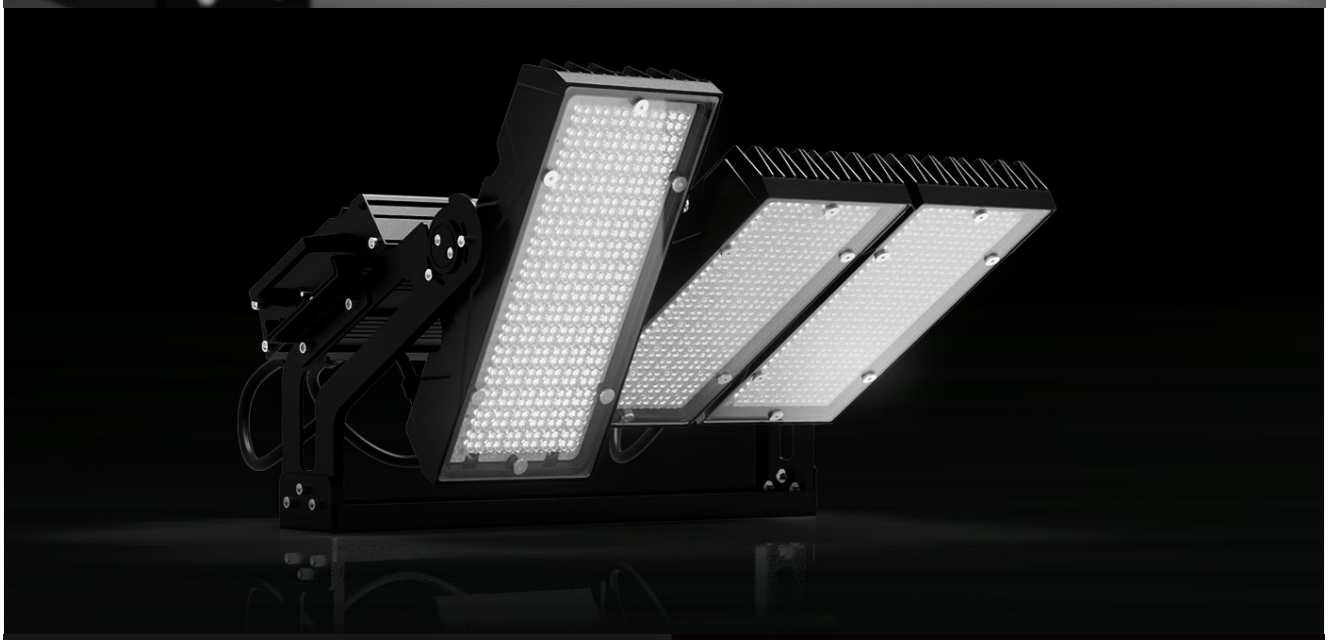

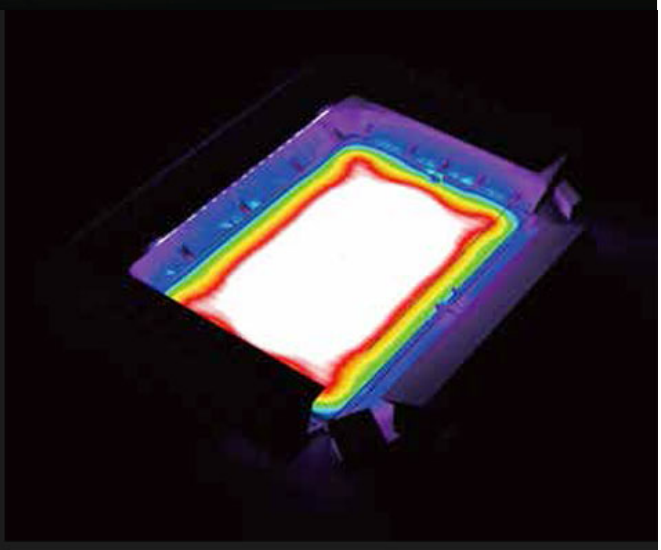

Dialux Simulation

Basic Information

Type: (EL06) LED Flood Light

Efficacy: 135LM/W

Wattage: 300W, 600W, 900W

IP66 10KV

Ingress Protection Surge Protection

Smart Controls

DALI
Dimmable

Plugged-in-pulled-out Connector

Rotatable Design

LED modules are connected by a rotation axle, which makes each module a 70° rotating range, while the multiple modules a 40°.





Beam Angles

ELMA1080


ELMA1061

ELMA2061

ELMA3061


ELMA4061

ELMA5061

ELMA1021

ELMA2021


ELMA3021

ELMA4021

ELMA5021

ELMA6021

ELMA7021

ELMA8021

ELMA9021